


Here's how to connect an RFID card or tag to your printing account

1. Place any RFID card (RFID tag), also called “Blip Card,” against the card reader on the printer. Bus transit cards, SL cards and some ATM/credit cards will work. When you place a blip card to the reader, you will see a question on the screen about linking the card to your user ID.
2. Log in with your University of Gävle user ID data.
3. Ready! Now your card is linked to your printing account and you can use the card to make copies and print.

If you don't see the question about linking the card, most likely the card does not have a blip function (RFID). You can only have one card attached to the printing function, however anytime you want you can connect a different card to your account in the printing system (and the old one will then be de-linked).

Select the printer “eduprint-hig”. This will be the “default printer” when the change is complete.

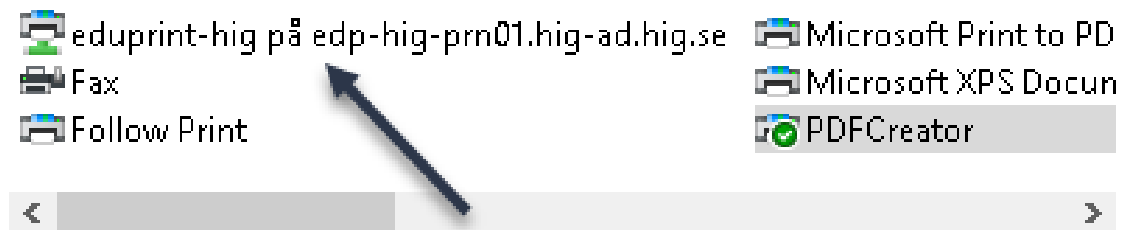

**2. Log in with
your user
information**

**1. Place
the card
on the
reader**

